

THE AURA™ SKYLIGHT

■ PROVIDES NATURAL LIGHT & SAVES ELECTRICITY

A clear polycarbonate top of skylight and the frosted ceiling unit allow for light entry.

■ ADAPTS TO ALL BUILDINGS



Fits all pitches of roofs

■ DURABLE AND MAINTENANCE FREE

Manufactured from aluminum and UV rated materials

■ INTERNALLY BUILT VENT


Designed to keep flex tube cool in summer and reduce radiant heat from entering home. In winter, condensation cannot accumulate in tube.

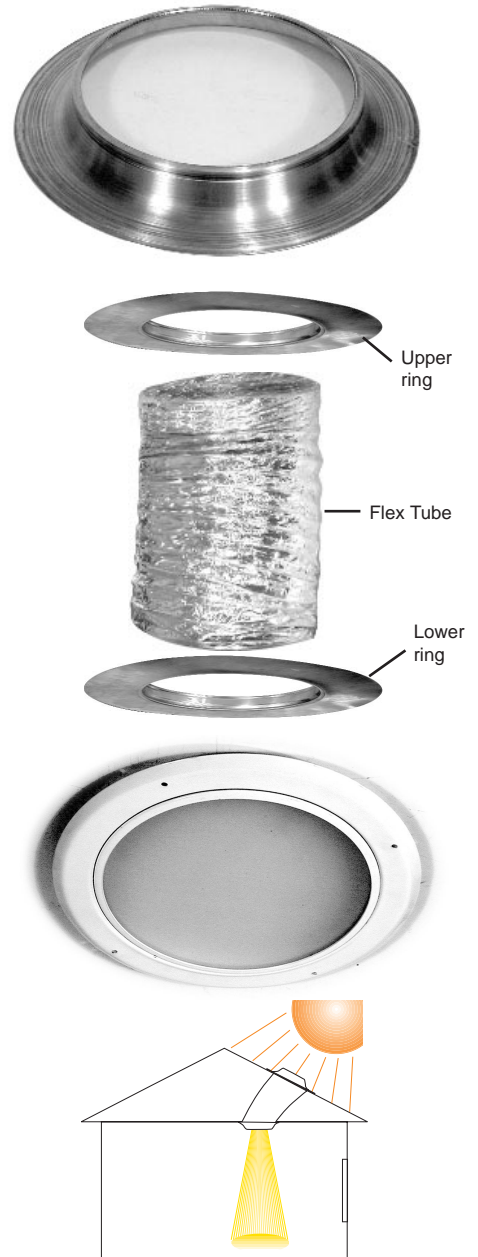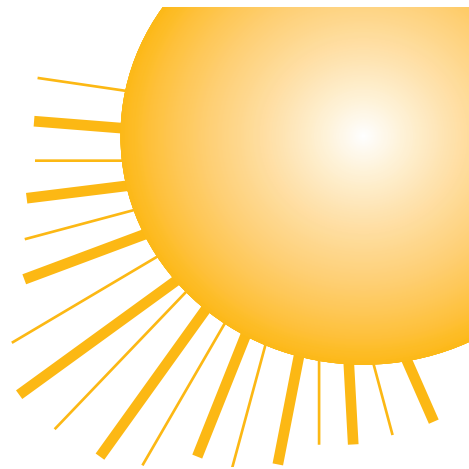

Manufacturer's Installation Instructions for the AURA SKYLIGHT

The following items need to be performed for the proper installation of the Aura Skylight. It is not necessary or required that the order be followed as printed. You can decide what is the best sequence for your particular plant.

1. Foam the lower ring and flex-duct assembly to the attic side of the ceiling.
2. Reach inside the flex-duct and cut the ceiling board out using the lower ring as a guide.
3. Cut a hole approximately 10-1/2" in diameter in the decking directly above the previously installed lower ring and flex-duct assembly.
4. Reach down and obtain the upper end of the flex-duct and insert it in the upper ring. The raised part of the upper ring should be upward.
5. Pull the flex-duct taut and cut off the excess duct. The flex duct will hold onto the upper ring without fastening.
6. Attach the upper ring to the decking.
7. Install the Aura Skylight over the upper ring and flex-duct assembly in the following manner:
 - A. Apply Sealant to under side of the flange.
 - B. Place over the upper ring and flex-duct assembly.
 - C. Fasten to the decking using #8 x 3/4" screws approximately 4" on center.
8. Install the ceiling lens into the lower ring and flex-duct assembly opening.
9. Screw the ceiling lens ring through the ceiling into the lower ring using the holes provided in the ceiling lens ring.



ACTIVE VENTILATION PRODUCTS, INC.

800-247-3463 845-565-7770

www.roofvents.com • E-mail: roofvents@aol.com • Fax 845-562-8963