

Active Ventilation Products Inc.

TEST REPORT

SCOPE OF WORK

This report gives the results of air leakage and flow rate testing on a vent. The sample was selected and supplied by the client and was received at the laboratories on:

July 16, 2024

The sample appeared to be in new unused condition upon receipt.

MODEL NUMBER

KV-3-TP

Keepa Vent, 3" Diameter, 8" Collar & Tail Pipe

Roof Jack Vent Cap for Flat Roofs & Exhaust Duct Applications

PROJECT NUMBER

G105373958

REPORT NUMBER

105373958CRT-001b

ISSUE DATE

July 29, 2024

REVISED DATE

10/1/2024

TEST DATE

July 16 - 24, 2024

DOCUMENT CONTROL NUMBER

DIFF.PKT.2022

© 2022 INTERTEK

The Intertek logo features the word "intertek" in a bold, lowercase, sans-serif font. A small yellow dot is positioned above the letter "i". Below the logo, the tagline "Total Quality. Assured." is written in a smaller, bold, sans-serif font.

intertek
Total Quality. Assured.

REPORT NUMBER
105373958CRT-001b

MODEL NUMBER(s)
KV-3-TP, Keepa Vent, 3" Diameter, 8" Collar & Tail Pipe

REPORT RENDERED TO:
Active Ventilation Products Inc.
311 1st
Newburgh, NY 12550

AUTHORIZATION

The testing performed was authorized by signed quote number Qu-0133691-6.

TEST STANDARDS

ANSI/AMCA Standard 500-L-23, entitled "Laboratory Methods of Testing Louvers for Rating".

In Charge of Testing:



Joey Esce
Project Engineer
Acoustical Testing

Reviewer:



Brian Cyr
Engineer
Acoustical Testing

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

SAMPLE INFORMATION

REPORT NO. 105373958CRT-001B

ITEMS RECEIVED

Item No.	Control No.	Model No.	Description	Received
1	CRT2407161018-001	KV-3-TP	Keepa Vent, 3" Diameter	July 16, 2024

DESCRIPTION OF TEST SPECIMEN

The sample consisted of an exhaust vent cap. The inlet measured 3 inches in diameter and the vent cap measured 5-1/2 inches in diameter. The gap between the cap and collar was measured to be 1 inch.

SAMPLE PHOTOS



TEST METHODS

Air Performance testing was conducted in accordance with ANSI/AMCA Standard 500-L-23, entitled "Laboratory Methods of Testing Louvers for Rating"

Air Volume was measured employing metering stations containing appropriately sized orifice plates.

RESULTS OF TESTS

REPORT NO. 105373958CRT-001B


AIR PERFORMANCE
KV-3-TP, Keepa Vent, 3" Diameter, 8" Collar & Tail Pipe

Pressure Drop Across Vent Cap		Air Velocity	Airflow Volume
<u>in. H₂O</u>	<u>Pa</u>	<u>fpm</u>	<u>SCFM</u>
0.045	11	1000	49
0.065	16	1204	59
0.085	21	1388	68
0.110	27	1612	79
0.140	35	1796	88
0.170	42	1980	97
0.200	50	2245	110
0.250	62	2469	121
0.300	75	2735	134
0.350	87	2980	146

fpm = feet per minute

in. H₂O = inches of water

scfm = standard cubic feet per minute

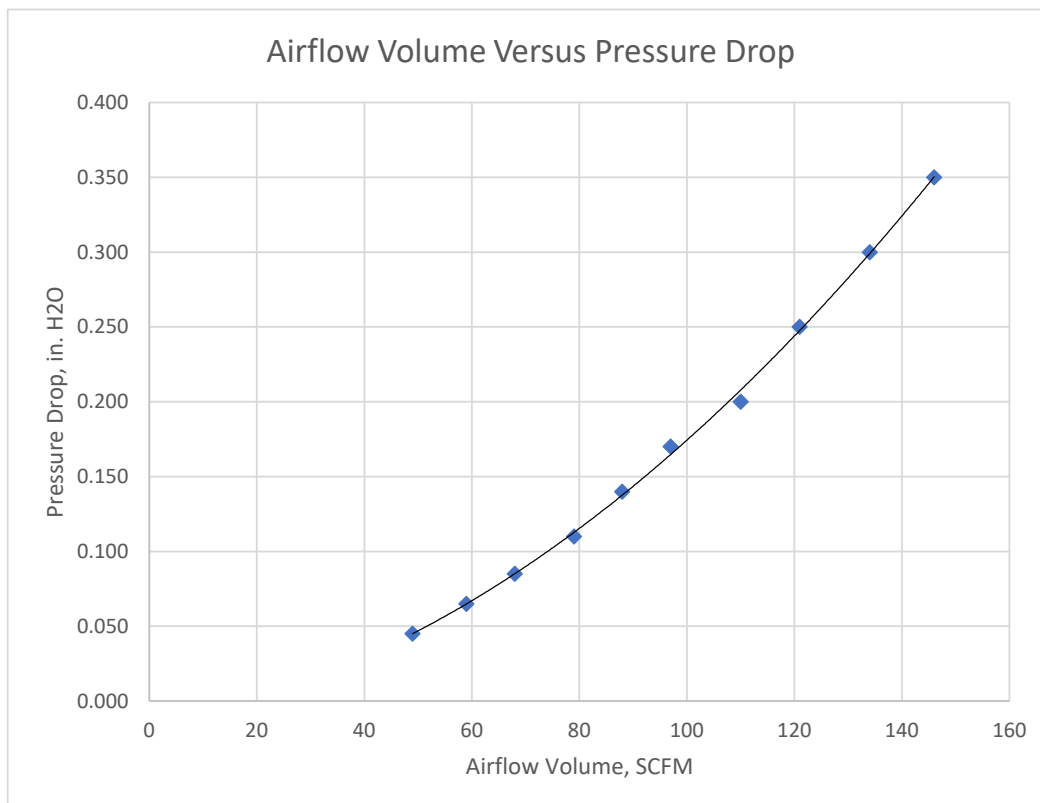

EQUIPMENT LIST

REPORT NO. 105373958CRT-001B

#	Equipment	Model No	Control No.	Last Cal	Cal Due
5	Manometer Incline	424-5	F166	3/5/2024	3/5/2025
6	Manometer Incline	424-5	F167	3/5/2024	3/5/2025
7	RTD Pair	78N01N00N040B3	T1440/1	6/12/2024	6/12/2025
8	Barometer	PTB110	P1063	6/12/2024	6/12/2025
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					

Remarks:

Test Conditions During Testing:

Drybulb Temperature: 81.1°F

Wetbulb Temperature: 72.8°F

Barometric Pressure: 28.5 in. Hg