## **Active Ventilation Products Inc.**

# **TEST REPORT**

#### **SCOPE OF WORK**

This report gives the results of air leakage and flow rate testing on a vent. The sample was selected and supplied by the client and was received at the laboratories on:

July 16, 2024

The sample appeared to be in new unused condition upon receipt.

#### **MODEL NUMBER**

KV-6-TP

Keepa Vent, 3" Diameter, 11" Collar & Tail Pipe Roof Jack Vent Cap for Flat Roofs & Exhaust Duct Applications

#### **PROJECT NUMBER**

G105373958

#### **REPORT NUMBER**

105373958CRT-004b

**ISSUE DATE** 

**REVISED DATE** 

July 29, 2024

10/1/2024

#### **TEST DATE**

July 16 - 24, 2024

#### **DOCUMENT CONTROL NUMBER**

DIFF.PKT.2022 © 2022 INTERTEK





3933 US RT 11 Cortland, NY 13045 Telephone: (607) 753-6711

www.intertek.com

### REPORT NUMBER

105373958CRT-004b

#### **MODEL NUMBER(s)**

KV-6-TP, Keepa Vent, 6" Diameter, 11" Collar & Tail Pipe

#### **REPORT RENDERED TO:**

Active Ventilation Products Inc. 311 1st Newburgh, NY 12550

#### **AUTHORIZATION**

The testing performed was authorized by signed quote number Qu-0133691-6.

#### **TEST STANDARDS**

ANSI/AMCA Standard 500-L-23, entitled "Laboratory Methods of Testing Louvers for Rating".

In Charge of Testing:

Joey Esce Project Engineer Acoustical Testing Reviewer:

Brian Cyr Engineer Acoustical Testing

Dim Cy

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Page 2 of 5 7/29/2024



3933 US RT 11 Cortland, NY 13045

Telephone: (607) 753-6711 www.intertek.com

#### **SAMPLE INFORMATION**

#### REPORT NO. 105373958CRT-004B

#### **ITEMS RECEIVED**

Item No.	Control No.	Control No. Model No. Description		Received	
1	CRT2407161018-004	KV-6-TP	Keepa Vent, 6" Diameter	July 16, 2024	

#### **DESCRIPTION OF TEST SPECIMEN**

The sample consisted of an exhaust vent cap. The inlet measured 5-3/4 inches in diameter and the vent cap measured 9 inches in diameter. The gap between the cap and collar was measured to be 1-5/16 inch.

#### **SAMPLE PHOTOS**







#### **TEST METHODS**

Air Performance testing was conducted in accordance with ANSI/AMCA Standard 500-L-23, entitled "Laboratory Methods of Testing Louvers for Rating"

Air Volume was measured employing metering stations containing appropriately sized orifice plates.

Page 3 of 5 7/29/2024



3933 US RT 11 Cortland, NY 13045

Telephone: (607) 753-6711 www.intertek.com

#### **RESULTS OF TESTS**

#### REPORT NO. 105373958CRT-004B


AIR PERFORMANCE
KV-6-TP, Keepa Vent, 6" Diameter, 11" Collar & Tail Pipe

Pressure Drop	Across Vent Cap	Air Velocity Airflow Volume	
in. H₂O	<u>Pa</u>	<u>fpm</u>	<u>SCFM</u>
0.040	10	403	79
0.090	22	607	119
0.160	40	806	158
0.240	60	1000	196
0.340	85	1214	238
0.440	109	1393	273
0.580	144	1607	315
0.710	177	1796	352
0.880	219	2286	448
1.100	274	2204	432

fpm = feet per minute

in. H20 = inches of water

scfm = standard cubic feet per minute

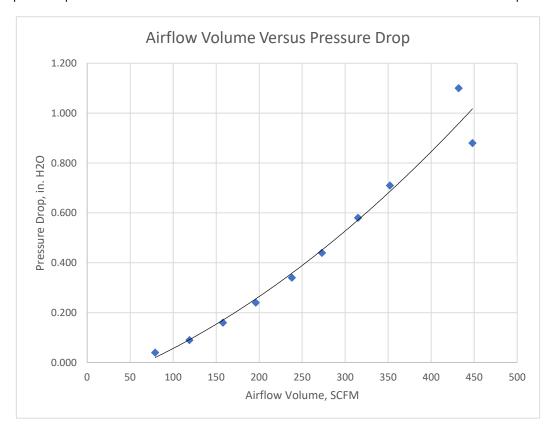

Page 4 of 5 7/29/2024



3933 US RT 11 Cortland, NY 13045

Telephone: (607) 753-6711

www.intertek.com

#### **EQUIPMENT LIST**

#### REPORT NO. 105373958CRT-004B

#	Equipment	Model No	Control No.	Last Cal	Cal Due
5	Manometer Incline	424-5	F166	3/5/2024	3/5/2025
6	Manometer Incline	424-5	F167	3/5/2024	3/5/2025
7	RTD Pair	78N01N00N040B3	T1440/1	6/12/2024	6/12/2025
8	Barometer	PTB110	P1063	6/12/2024	6/12/2025
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					

Remarks:

Test Conditions During Testing:

Drybulb Temperature: 78.5°F
Wetbulb Temperature: 69.9°F
Barometric Pressure: 28.6 in. Hg

Page 5 of 5 7/29/2024