

Screw Pattern (Symmetrical for all sides)



Roof Curb Flashing Detail

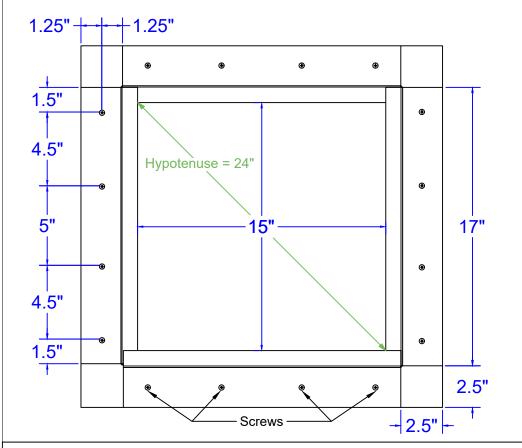

- Aluminum Alloy 3003-H14
- Thickness = $0.040" \pm 0.005$
- Tolerance = $\pm .25 (\frac{1}{4}")$

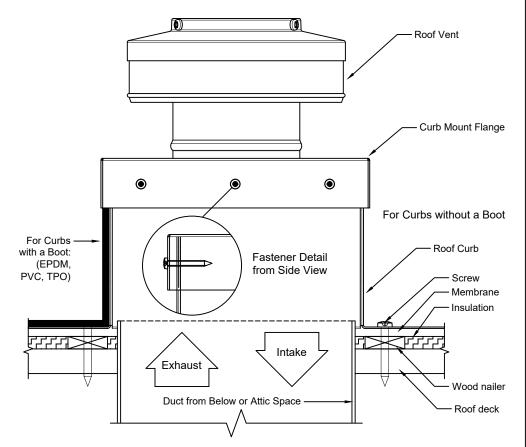

Roof Curb Installation Instructions

- 1. Cut a square or round hole 15" in diameter in the roof deck.
- 2. Total number of screws needed for flange = 16
- 3. Recommended installation screw: **Flat, Bugle or Wafer Head** #10 x 1 1/2" Sheet Metal Screw, Type A Point
- Flash roof curb onto deck according to specifications of the membrane manufacturer.
- 5. Screws not included.

Square Roof Curb Model: SRC-14-H8

Inside Opening: 15", Outside Length & Width: 17", Height: 8"



Active Ventilation Products, Inc.

11/14/2023