



## Roof Curb Flashing Detail

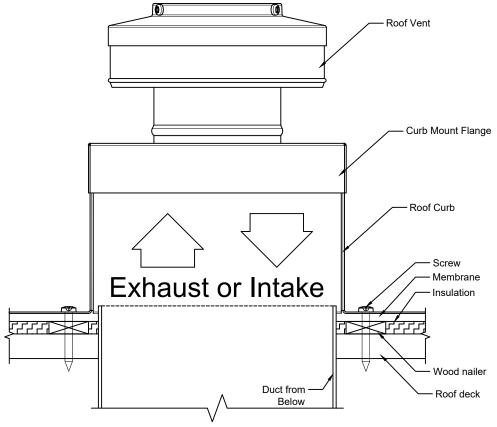

- Aluminum Alloy 3003-H14

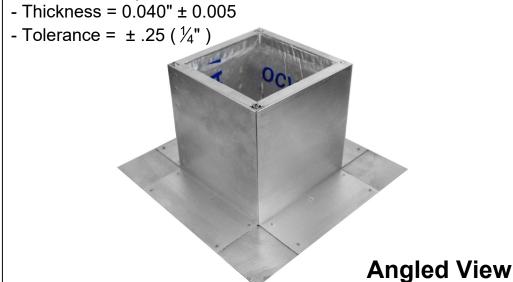

## **Roof Curb Installation Instructions**

- 1. Cut a round hole 5" in diameter in the roof deck.
- 2. Total number of screws needed for flange = 8
- 3. Recommended installation screw: #10 x 1 1/2" Sheet Metal Screw
- Flash roof curb onto deck according to specifications of the membrane manufacturer.
- 5. Screws not included.

Insulated Roof Curb Model: SRC-3-H6-Ins

Inside Diameter: 5", Outside Length & Width: 6", Height: 6"



**Active Ventilation Products, Inc.** 

Website: roofvents.com

Email: sales@roofvents.com

1/1/2023