


## Screw Pattern (Symmetrical for all sides)




- Aluminum Alloy 3003-H14
- Thickness = 0.040"  $\pm$  0.005
- Tolerance =  $\pm$  .25 (  $\frac{1}{4}$  )

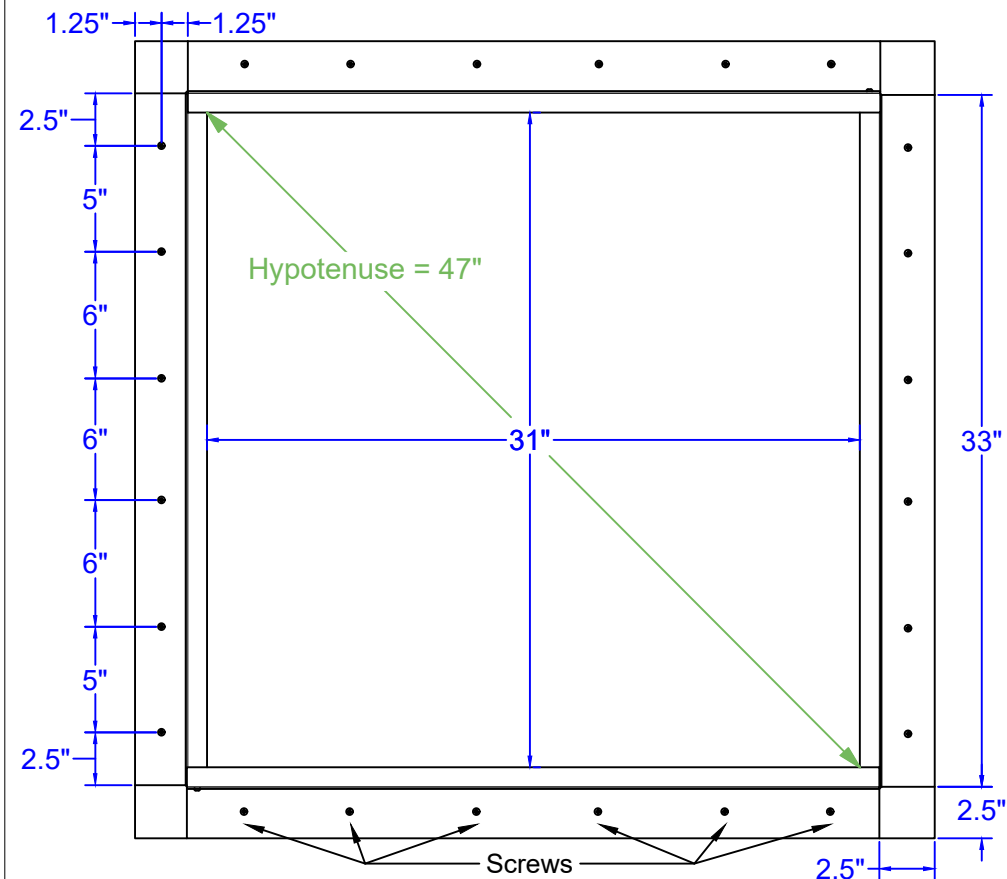

Angled View

## Roof Curb Flashing Detail

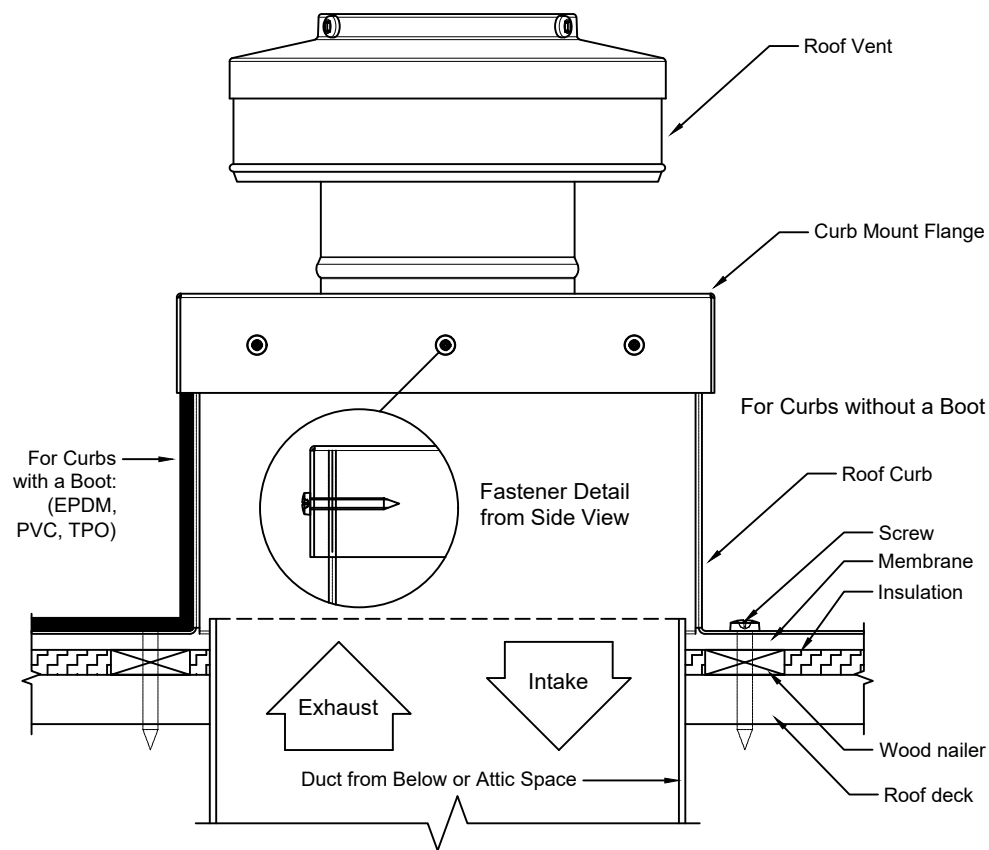


## Roof Curb Installation Instructions

1. Cut a square or round hole 31" in diameter in the roof deck.
2. Total number of screws needed for flange = 24
3. *Recommended installation screw: **Flat, Bugle or Wafer Head #10 x 1 1/2"** Sheet Metal Screw, Type A Point*
4. Flash roof curb onto deck according to specifications of the membrane manufacturer.
5. Screws not included.

### Square Roof Curb Model: SRC-30-H8

Inside Opening: 31", Outside Length & Width: 33", Height: 8"



**Active Ventilation Products, Inc.**

Website: [roofvents.com](http://roofvents.com)

Email: [sales@roofvents.com](mailto:sales@roofvents.com)

11/17/2023