


Screw Pattern (Symmetrical for all sides)




- Aluminum Alloy 3003-H14
- Thickness = 0.040" \pm 0.005
- Tolerance = \pm .25 ($\frac{1}{4}$ ")

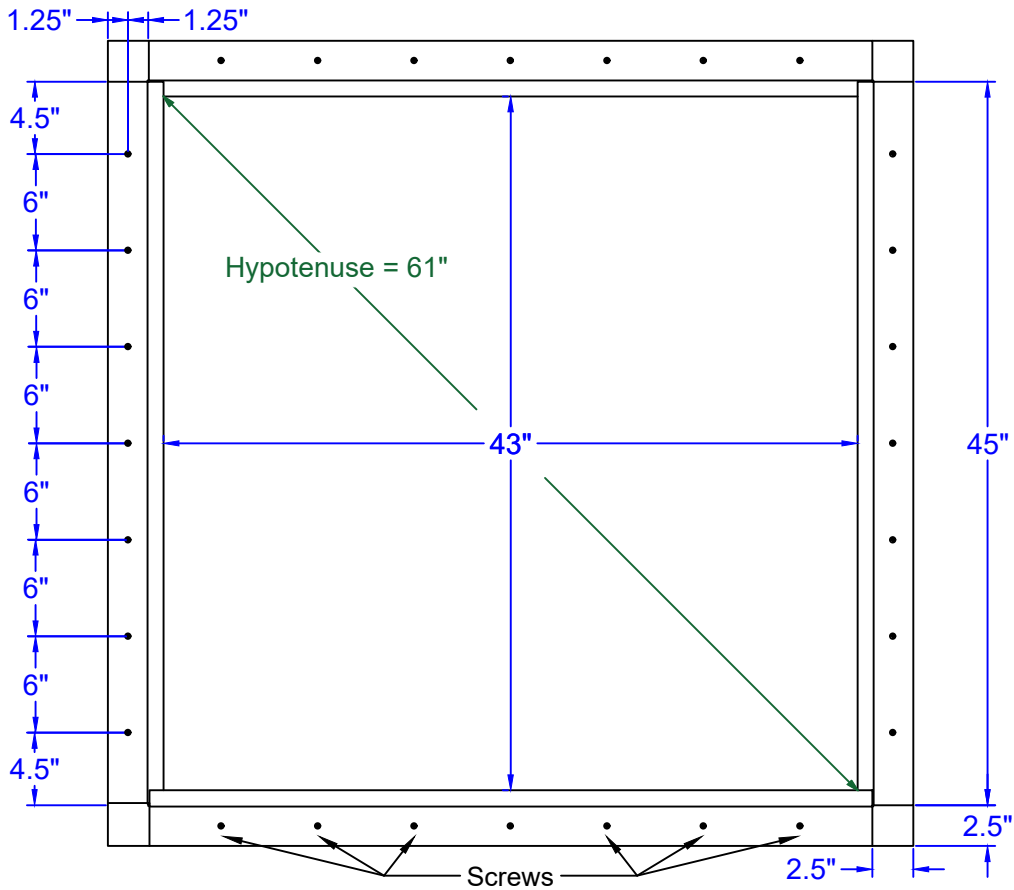

Angled View

Roof Curb Flashing Detail

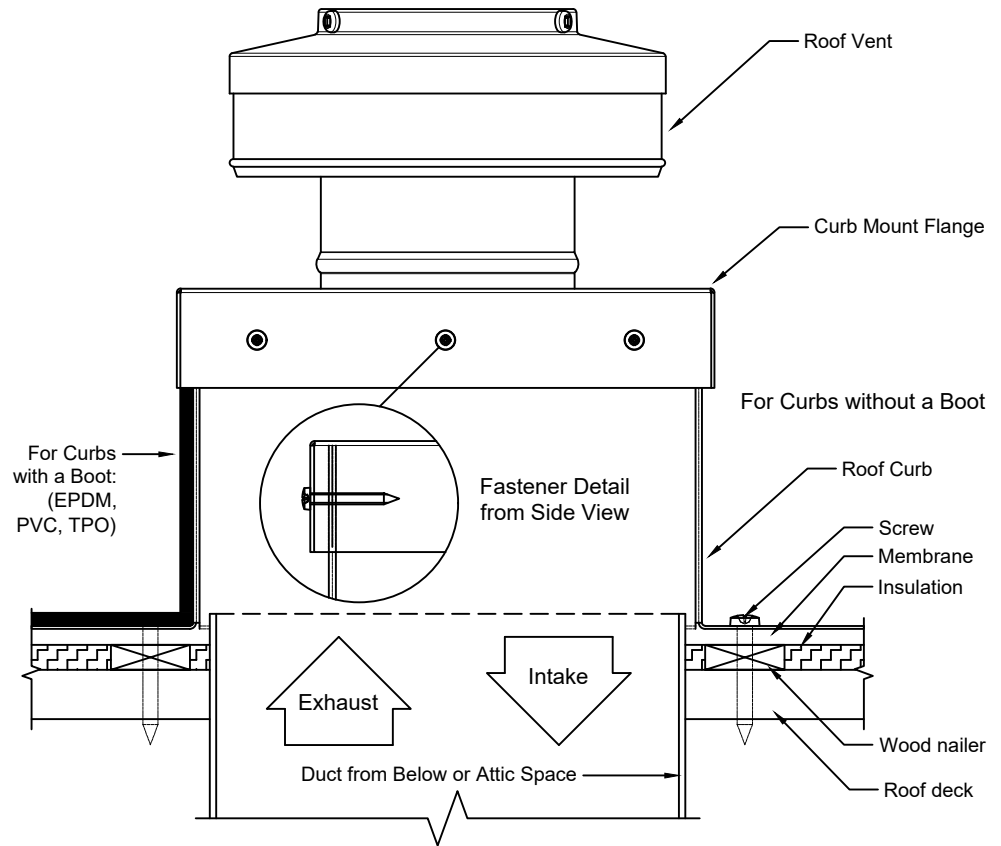


Roof Curb Installation Instructions

1. Cut a round hole 43" in diameter in the roof deck.
2. Total number of screws needed for flange = 28
3. *Recommended installation screw: **Flat, Bugle or Wafer Head** #10 x 1 1/2" Sheet Metal Screw, Type A Point*
4. Flash roof curb onto deck according to specifications of the membrane manufacturer.
5. Screws not included.

Square Roof Curb Model: SRC-42-H8

Inside Opening: 43", Outside Length & Width: 45", Height: 8"



Active Ventilation Products, Inc.

Website: roofvents.com

Email: sales@roofvents.com

11/17/2023