


- Aluminum Alloy 3003-H14
- Thickness = 0.025"  $\pm$  0.005
- Tolerance =  $\pm$  .25 (  $\frac{1}{4}$ " )



## Angled View

## Roof Curb Flashing Detail

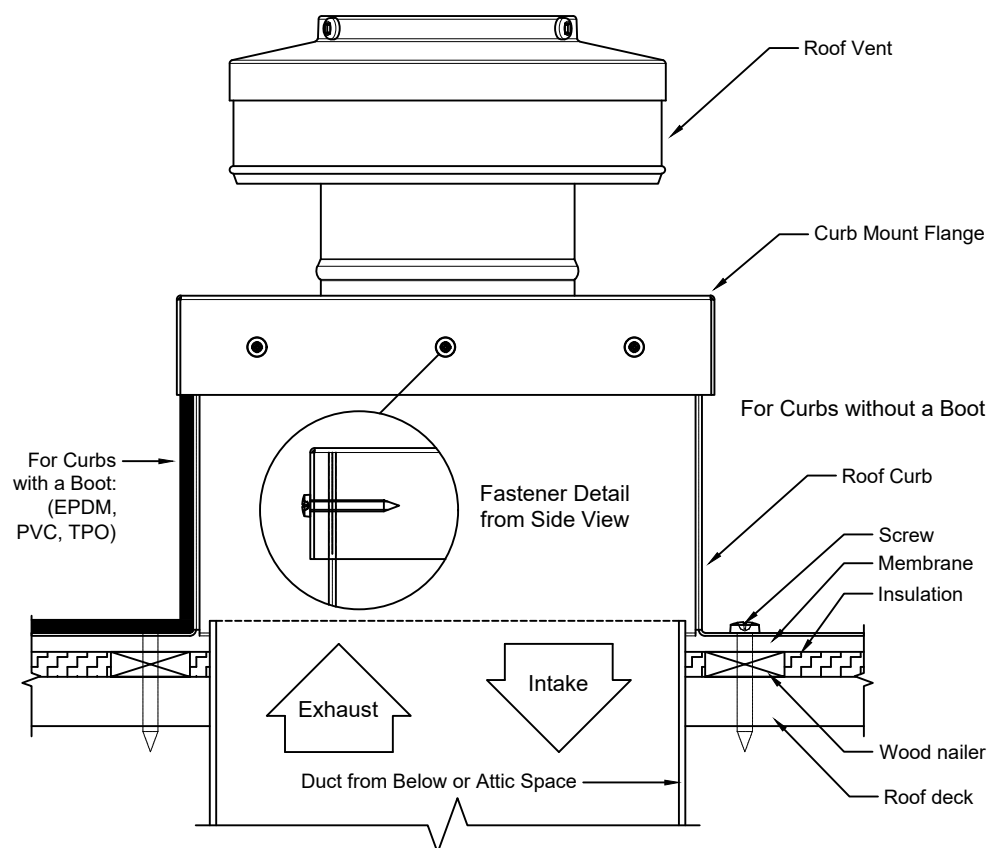


## Roof Curb Installation Instructions

1. Cut a round hole 8" in diameter in the roof deck.
2. Total number of screws needed for flange = 12
3. *Recommended installation screw: **Flat, Bugle or Wafer Head** #10 x 1 1/2" Sheet Metal Screw, Type A Point*
4. Flash roof curb onto deck according to specifications of the membrane manufacturer.
5. Screws not included.

**Square Roof Curb    Model: SRC-6-H8**

**Inside Diameter: 8", Outside Length & Width: 9", Height: 8"**



## Active Ventilation Products, Inc.

Website: [roofvents.com](http://roofvents.com)

Email: [sales@roofvents.com](mailto:sales@roofvents.com)

11/9/2023