### Tail Pipe Installation with Roof Vent

Step 1:

Turn the vent upside down and make a cardboard template from the flange. The template should be the same size as the flange with the hole in the middle.



Step 2:

Using the template, trace the square and circle onto the roof as shown.



Step 3:

Remove cardboard template to show the square and circle pattern.



Step 4:

Using a reciprocating saw cut out a hole in the roof deck and remove all debris.





# Active Ventilation Products, Inc.

311 First Street, Newburgh, NY 12550-4857

800-ROOF VENT (766-3836) Ph: 845-565-7770 Fax: 845-562-8963

Website: roofvents.com Email: sales@roofvents.com

5777-5

### Tail Pipe Installation with Roof Vent

Step 5: Once the hole is cut reach in the attic and pull up the duct through the hole.



Step 7: Using a Zip Tie secure the Flex Duct to the Tail Pipe.



Step 6: Insert the bottom of the Tail Pipe to the flex duct.



**Step 8:**Put roofing sealant on the underside along the bottom edge of falnge as shown





# Active Ventilation Products, Inc.

311 First Street, Newburgh, NY 12550-4857

800-ROOF VENT (766-3836) Ph: 845-565-7770 Fax: 845-562-8963

Website: roofvents.com Email: sales@roofvents.com

### Tail Pipe Installation with Roof Vent

**Step 9**: Push Flex Duct back into attic, then lift shingles to insert flange underneath.




Step 10:

With the vent in place secure the flange to the shingle roof using a screw gun or drill



10A: Required screw: #10 x 1.5" steel sheet metal screw Total number of screws required = 8

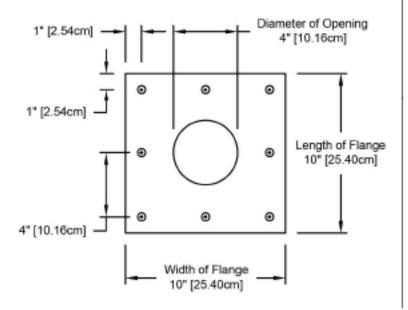

Step 11:

This is how the Keepa Vent should look when finished.





# Active Ventilation Products, Inc.

311 First Street, Newburgh, NY 12550-4857

800-ROOF VENT (766-3836) Ph: 845-565-7770 Fax: 845-562-8963

Website: roofvents.com Email: sales@roofvents.com

5777-5