## Top View

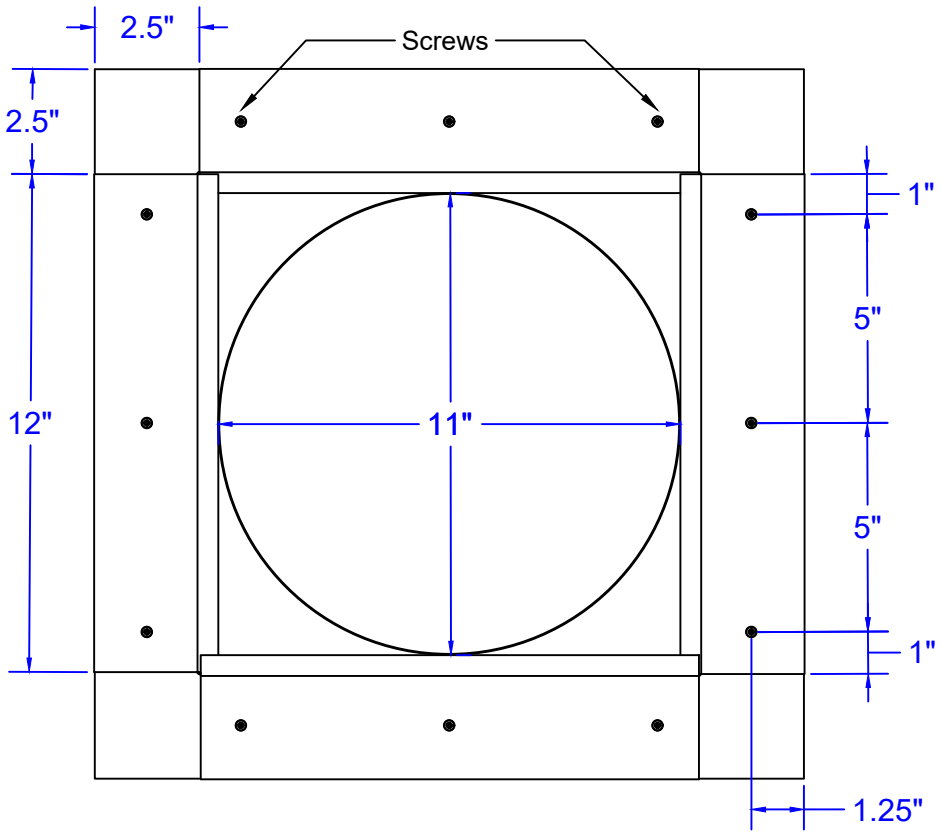


## Roof Curb Flashing Detail

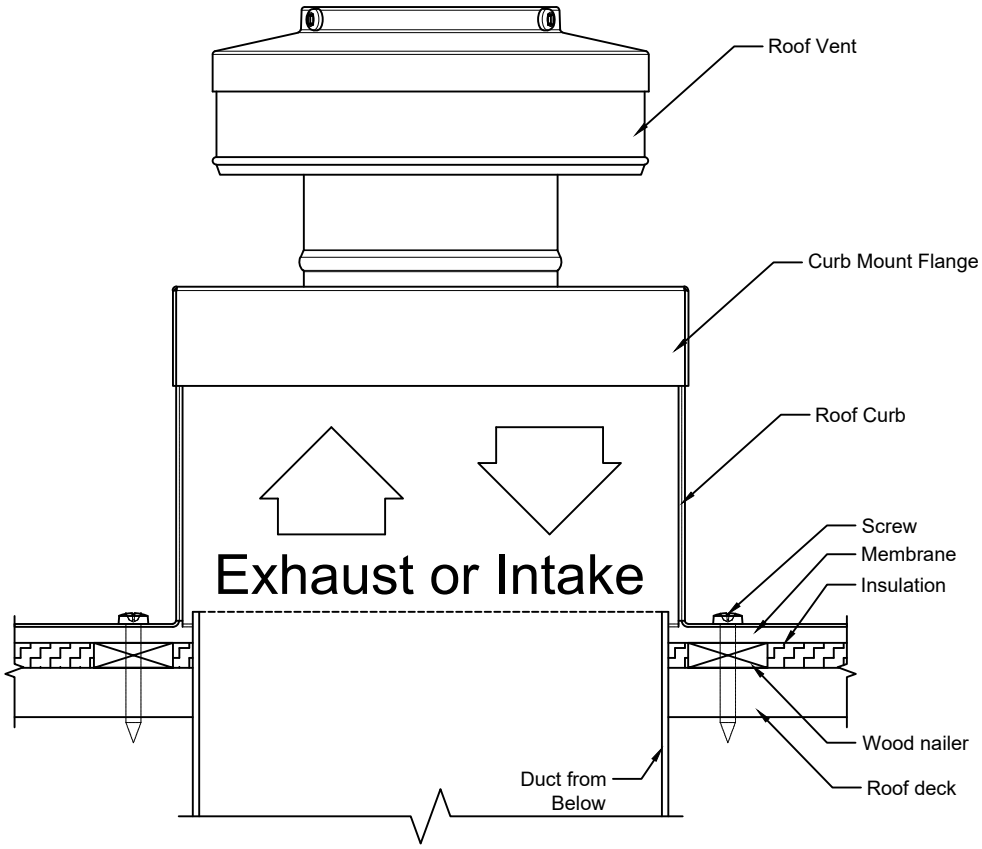


- Aluminum Alloy 3003-H14
- Thickness = 0.025" ± 0.005
- Tolerance = ± .25 ( ¼" )

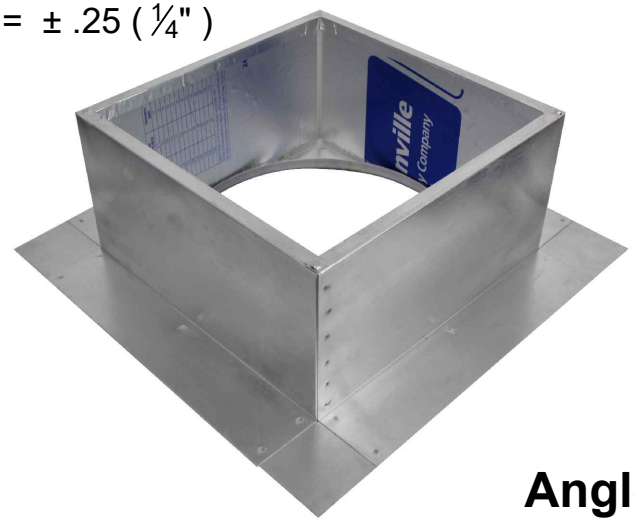

## Angled View

## Roof Curb Installation Instructions

1. Cut a round hole 11" in diameter in the roof deck.
2. Total number of screws needed for flange = 12
3. *Recommended installation screw: #10 x 1 1/2" Sheet Metal Screw*
4. Flash roof curb onto deck according to specifications of the membrane manufacturer.
5. Screws not included.

**Insulated Roof Curb Model: RC-9-H6-Ins**

**Inside Opening: 11", Outside Length & Width: 12", Height: 6"**

**Active Ventilation Products, Inc.**

Website: roofvents.com Email: sales@roofvents.com

**1/1/2023**